



Shanghai Miyue
Semiconductors Co.,Ltd
Tel:0086-21-57159233
Fax:0086-21-60415325

ESD2V8P8U

Features


- 400 W Peak Pulse Power per Line (tp=8/20s)
- Protects two line pairs(four lines).
- Low capacitance
- Low Leakage Current
- For space saving application
- Low Operating and Clamping Voltages.
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

- Operating Junction & Storage Temperature: -55°C to +150°C


Parameter	Symbol	Limits	unit
IEC61000-4-2(ESD) Air Contact		±15 ±8	KV
Peak Power Dissipation@8/20us	Ppk	400	W

Pin Configuration



2.8 Volts ESD Protection Device

SOP-8

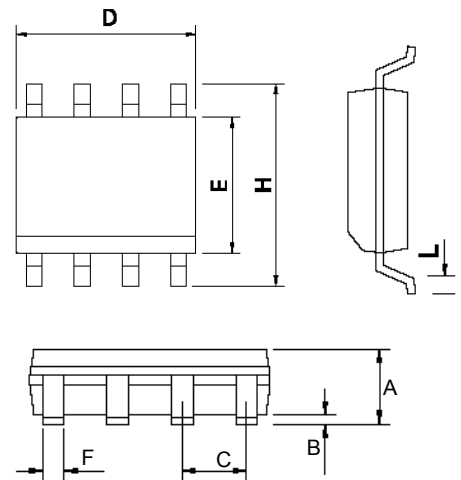

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.053	.069	1.35	1.75	
B	.004	.010	0.10	0.25	
C	0.050BSC		1.27BSC		
F	.013	.020	0.33	0.51	
D	.189	.197	4.80	5.00	
E	.150	.157	3.80	4.00	
H	.228	.244	5.80	6.20	
L	.016	.040	0.40	1.04	



ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted,)

Device*	Device Marking	V_{RWM} (V)	I_D (μ A) @ V_{RWM}	V_{BR} (V) @ I_T		I_T mA	V_c (V) @Max $I_{pp}=1A$	V_c (V) @Max $I_{pp}=5A$	I_{pp} (A) Max	C (pF) Max
				Min	Max		Max	Max		
ESD2V8P8U	---	2.8	1	3.0	---	1.0	5.5	8.5	---	3

Typical Characteristics

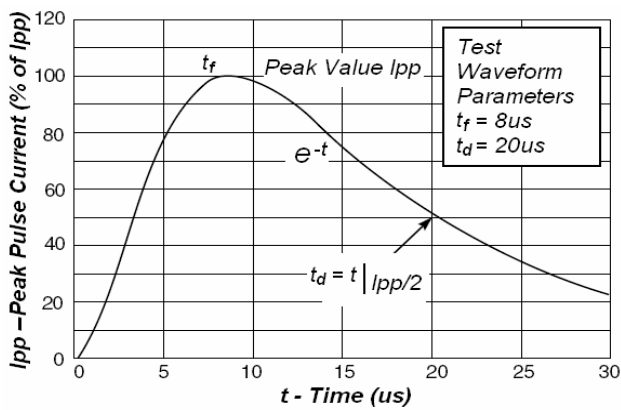


Fig1. Pulse Waveform

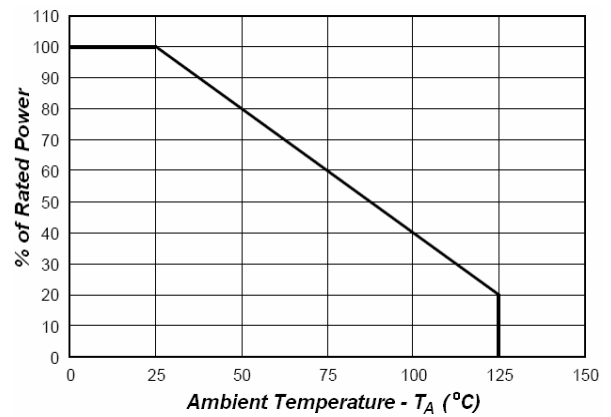


Fig2. Power Derating Curve

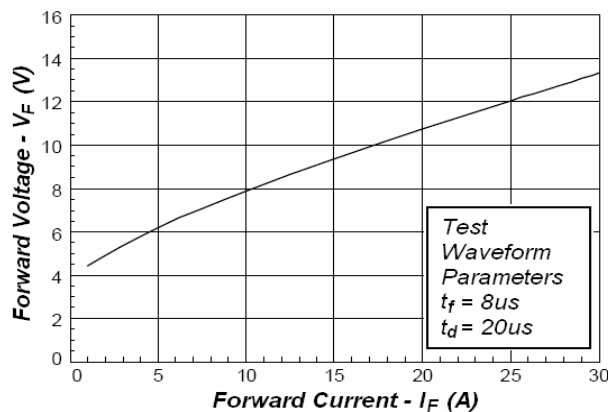


Fig3. Forward Voltage vs. Forward Current