



Shanghai Miyue
Semiconductors Co.,Ltd
Tel:0086-21-57159233
Fax:0086-21-60415325

ESDLC3V3D3B Thru ESDLC12VD3B

Features


- SOD-323 package
- Low clamping voltage
- ESD protection > 40 KV
- 350W peak pulse power (8/20 us)
- Case Material: Molded Plastic. UL Flammability Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

Parameter	Symbol	Limits	unit
Peak pulse power 8/20us	P _{PP}	350	W
Operating Temperature	T _j	-55~+150	°C
Storage temperature	T _{stg}	-55~+150	°C


3.3V-12Volts ESD Protection Device

SOD-323

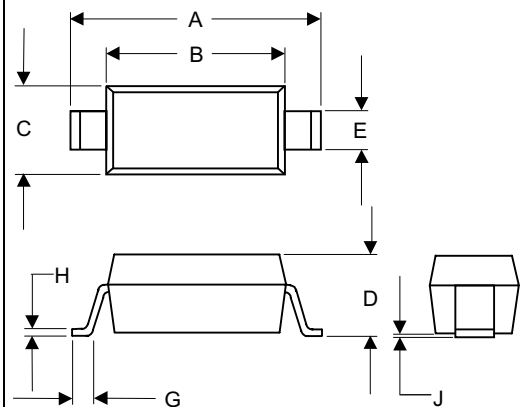


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.090	.107	2.30	2.70	
B	.063	.071	1.60	1.80	
C	.045	.053	1.15	1.35	
D	.031	.045	0.80	1.15	
E	.010	.016	0.25	0.40	
G	.004	.018	0.10	0.45	
H	.004	.010	0.10	0.25	
J	-----	.006	-----	0.15	

SUGGESTED SOLDER PAD LAYOUT

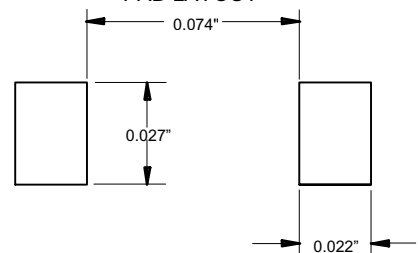

Pin Configuration-Top View



ESDLC3V3D3B-ESDLC12VD3B



ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Device	V_{RWM}	I_R @ V_{RWM}	Min Breakdown Voltage V_{BR} @1mA	Max Clamping Voltage V_c		Typ. Cj @0V,1MHZ
				@ $I_{P=1A}$	@ I_{PP}	
	Volts	μA	Volts	Volts	Volts	pF
ESDLC3V3D3B	3.3	1	4.0	7.0	36.0@28.0A	4.5
ESDLC5V0D3B	5	1	6.0	9.8	32.0@21.0A	5
ESDLC12VD3B	12	1	13.3	19.0	28.6@11.0A	3

