



Shanghai Miyue  
Semiconductors Co.,Ltd  
Tel:0086-21-57159233  
Fax:0086-21-60415325

**R4000  
THRU  
R5000**

## Features

- Lead Free Finish/Rohs Compliant (Note1) ("P" Suffix designates Compliant. See ordering information)
- Low Cost
- Low Leakage
- High Surge Capability
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1


## Maximum Ratings

- Operating Temperature: -65°C to +150°C
- Storage Temperature: -65°C to +150°C

Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
R4000	R4000	4000V	2800V	4000V
R5000	R5000	5000V	3500V	5000V

**200 mA  
High Voltage  
Silicon Rectifier  
4000 to 5000 Volts**

DO-15

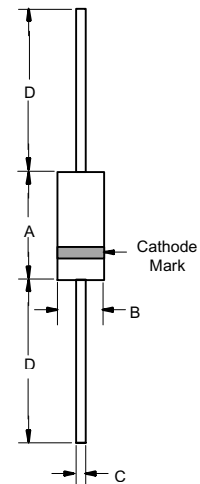

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	200mA	$T_A = 50^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	30A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	$V_F$	5.0V	$I_{FM} = 0.2A;$ $T_A = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	5.0μA 40μA	$T_A = 25^\circ\text{C}$ $T_C = 100^\circ\text{C}$
Maximum Full Load Reverse Current, Full Cycle Average 9.5mm lead length at $T_L = 75^\circ\text{C}$	$I_{R(AV)}$	30μA	

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.230	.300	5.80	7.60	
B	.104	.140	2.60	3.60	
C	.026	.034	.70	.90	
D	1.000	---	25.40	---	

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.